

ITRS

Electronic fan speed controller with TK



Key features

- Wide power supply range (110—240 VAC / 50—60 Hz)
- Automatic supply voltage detection
- Adjustable stepless output voltage
- 230 VAC alarm output
- TK monitoring for thermal motor protection
- Contacts for remote on/off switching
- Minimum and maximum speed adjustable by internal trimmers
- Overheating motor protection
- Kick start or soft start
- Illuminated on/off switch
- Operating and fault detection LED indications

Area of use

- Fan speed control of voltage controllable motors in ventilation systems
- For indoor use only

Technical specifications

Input voltage	110—240 VAC / 50—60 Hz	
Regulated output	Umin—Us	
Maximum load	depends on the version	
Unregulated output	230 VAC / Imax. 2 A	
Minimum output voltage, MIN	30—60 % of Us	
Maximum output voltage, MAX	70—100 % of Us	
Alarm output	230 VAC, Imax. 0,5 A	
Kick start duration	8—10 s	
Protection	Motor overheating	
Ambient conditions	Temperature	-20—35 °C
	Relative humidity	5—95 % rH (non-condensing)
Protection standard	IP54 (according to EN 60529)	

Article codes

Article code	Rated max. current [A]	Fuse [A]
ITRS9-15-DT	3,0 5,0 6,0 10,0	(5*20 mm) F 3,15 A H 250 VAC
ITRS9-30-DT		(5*20 mm) F 5,0 A H 250 VAC
ITRS9-50-DT		(5*20 mm) F 8,0 A H 250 VAC
ITRS9-60-DT		(6,3*32 mm) F 10,0 A H 250 VAC
ITRS9100-DT		(6,3*32 mm) F 16,0 A H 250 VAC


Standards



- Low Voltage Directive 2014/35/EC
- EMC Directive 2014/30/EU: EN 61000-6-3:2007/A1:2011/AC:2012
- WEEE 2012/19/EC
- RoHS Directive 2011/65/EC




Operational diagram

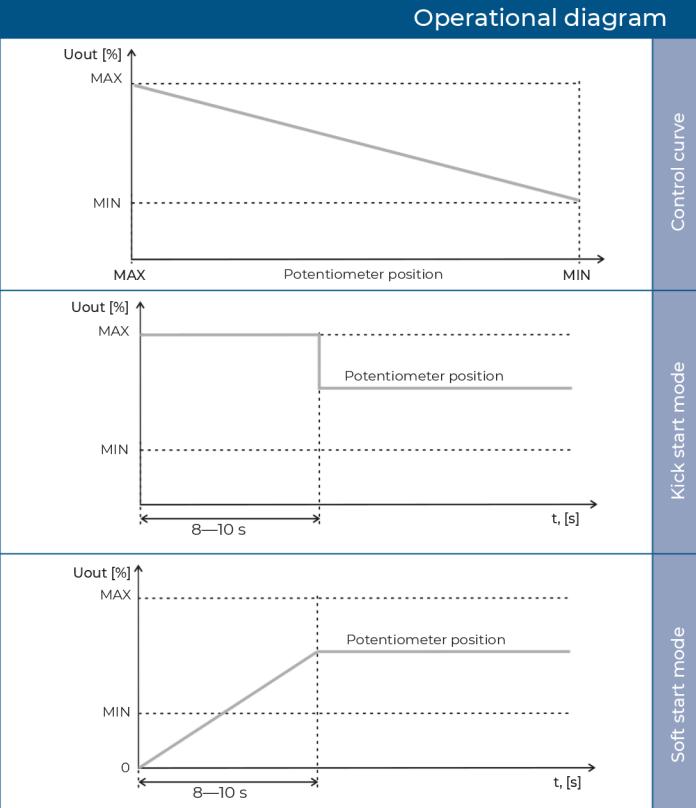



Legend

ITRS9-15-DT, ITRS9-30-DT

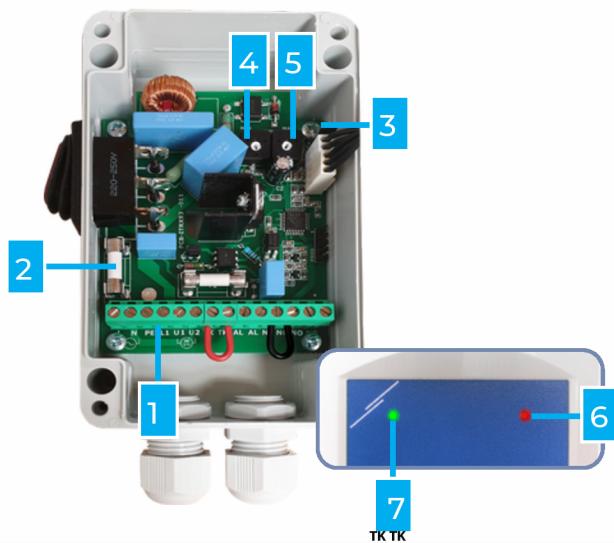


1 - Terminal block	 L N PE L1 U1 U2 U1 M AL AL NC NC NO NO	
2 - Fuse		
3 - Kick start selection jumper	 	Kick start is enabled Soft start is enabled
4 - Minimum speed trimmer		Adjusts the min. speed (factory preset to 45 % of Us)
5 - Maximum speed trimmer		Adjusts the max. speed (factory preset to 100 % of Us)
LED indications		
6 - Red LED	On	TK detection. The motor is overheated and the controller stops. The alarm output is activated. Restart the controller via the ON/OFF switch
7 - Green LED	On	Normal operation
7 - Green LED	Blinking	NC or NO contact is activated. The controller stops
6 and 7	Alternating	The potentiometer is disconnected. The controller stops

* indicates closed position of the jumper.

Legend

ITRS9-50-DT

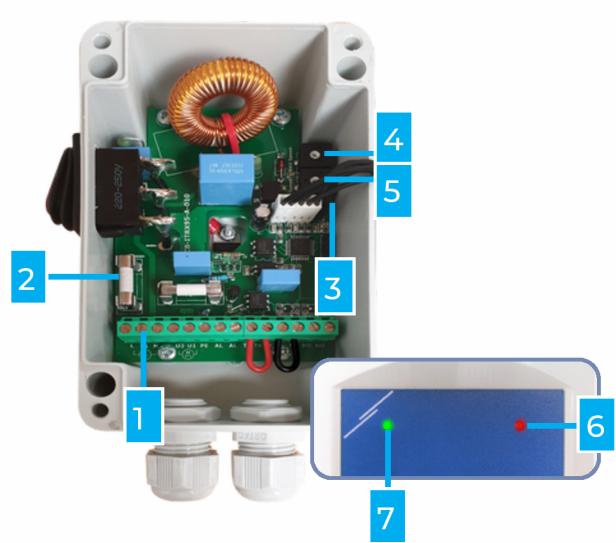


1 - Terminal block	 L L1 N U1 U2 U1 PE M AL AL TK TK NC NC NO NO	
2 - Fuse		
3 - Kick start selection jumper	 	Kick start is enabled Soft start is enabled
4 - Minimum speed trimmer		Adjusts the min. speed (factory preset to 45 % of Us)
5 - Maximum speed trimmer		Adjusts the max. speed (factory preset to 100 % of Us)
LED indications		
6 - Red LED	On	TK detection. The motor is overheated and the controller stops. The alarm output is activated. Restart the controller via the ON/OFF switch
7 - Green LED	On	Normal operation
7 - Green LED	Blinking	NC or NO contact is activated. The controller stops
6 and 7	Alternating	The potentiometer is disconnected. The controller stops

* indicates closed position of the jumper.




Legend

ITRS9-60-DT, ITRS9100-DT

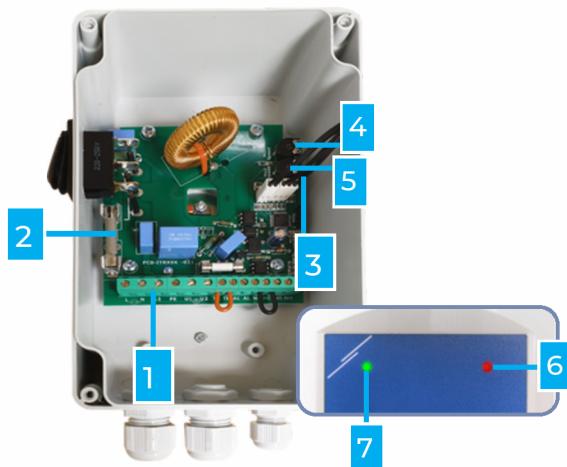

1 - Terminal block

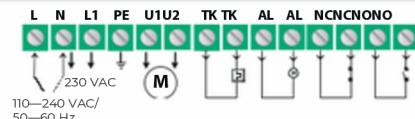

2 - Fuse



3 - Kick start selection jumper



Kick start is enabled



Soft start is enabled

4 - Minimum speed trimmer



Adjusts the min. speed (factory preset to 45 % of Us)

5 - Maximum speed trimmer



Adjusts the max. speed (factory preset to 100 % of Us)

LED indications

6 - Red LED



TK detection. The motor is overheated and the controller stops. The alarm output is activated. Restart the controller via the ON/OFF switch

7 - Green LED



Normal operation

Blinking



NC or NO contact is activated. The controller stops

6 and 7



The potentiometer is disconnected and the controller stops

* indicates closed position of the jumper.

Note: To disable the ON / OFF switch, connect the 230 VAC supply voltage to the unregulated output (L1). In this case, do not connect the power supply to L. This is only allowed for 1,5 A and 3,0 A versions!

Wiring and connections

ITRS9-15-DT, ITRS9-30-DT

L	Power supply, line (110—240 VAC / 50—60 Hz)
N	Neutral
L1	Unregulated output, line (230 VAC / Imax. 2 A)
PE	Protective earth
U2	Regulated output to motor, neutral
U1	Regulated output to motor, line
TK	Input - TK monitoring for thermal motor protection
AL	Alarm output (230 VAC / Imax / 0,5 A)
AL	Input - normally closed contact for remote ON / OFF switching
NC	Input - normally open contact for remote ON / OFF switching
NO	Input - normally closed contact for remote ON / OFF switching
NO	Input - normally open contact for remote ON / OFF switching

ITRS9-50-DT


L	Power supply, line (110—240 VAC / 50—60 Hz)
L1	Unregulated output, line (230 VAC / Imax. 2 A)
N	Neutral
U2	Regulated output to motor, neutral
U1	Regulated output to motor, line
PE	Protective earth
AL	Alarm output (230 VAC / Imax / 0,5 A)
AL	Input - TK monitoring for thermal motor protection
NC	Input - normally closed contact for remote ON / OFF switching
NC	Input - normally open contact for remote ON / OFF switching
NO	Input - normally closed contact for remote ON / OFF switching
NO	Input - normally open contact for remote ON / OFF switching

ITRS9-60-DT, ITRS9100-DT

L	Power supply, line (110—240 VAC / 50—60 Hz)
N	Neutral
L1	Unregulated output, line (230 VAC / Imax. 2 A)
PE	Protective earth
U2	Regulated output to motor, neutral
U1	Regulated output to motor, line
TK	Input - TK monitoring for thermal motor protection
TK	Alarm output (230 VAC / Imax / 0,5 A)
NC	Input - normally closed contact for remote ON / OFF switching
NC	Input - normally open contact for remote ON / OFF switching
NO	Input - normally closed contact for remote ON / OFF switching
NO	Input - normally open contact for remote ON / OFF switching




Fixing and dimensions

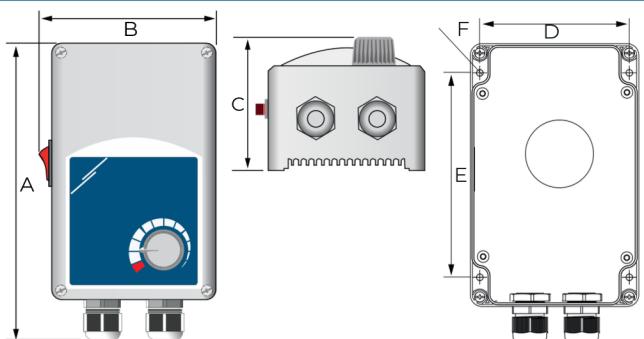

Article code	A	B	C	D	E	F
ITRS-9-15-DT	162 mm	96 mm	75 mm	71 mm	108,8 mm	Ø 4,2
ITRS-9-30-DT	162 mm	96 mm	93 mm	71 mm	108,8 mm	Ø 4,2
ITRS-9-50-DT	162 mm	96 mm	95 mm	71 mm	108,8 mm	Ø 4,2
ITRS-9-60-DT	205 mm	124 mm	97 mm	102 mm	140 mm	Ø 4,6
ITRS9100-DT						

Packaging



Article	Packaging	Length [mm]	Width [mm]	Height [mm]	Net weight	Gross weight
ITRS9-15-DT	Unit (1 pc.)	175	96	95	0,41 kg	0,47 kg
	Box (24 pcs.)	590	380	280	9,9 kg	12 kg
ITRS9-30-DT	Unit (1 pc.)	175	96	95	0,45 kg	0,51 kg
	Box (24 pcs.)	590	380	280	10,9 kg	13 kg
ITRS9-50-DT	Unit (1 pc.)	175	96	95	0,64 kg	0,70 kg
	Box (24 pcs.)	590	380	280	15,4 kg	17,5 kg
ITRS9-60-DT	Unit (1 pc.)	210	130	110	0,83 kg	0,92 kg
	Box (15 pcs.)	540	405	245	12,42 kg	14,64 kg
ITRS9100-DT	Unit (1 pc.)	210	130	110	0,95 kg	1,04 kg
	Box (15 pcs.)	540	405	245	14,25 kg	16,44 kg

Global trade item numbers (GTIN)

Packaging	Unit	Box	Pallet
ITRS9-15-DT	05401003008324	05401003501825	05401003700235
ITRS9-30-DT	05401003008331	05401003501832	05401003700242
ITRS9-50-DT	05401003008348	05401003501849	05401003700259
ITRS9-60-DT	05401003008355	05401003501856	05401003700266
ITRS9100-DT	05401003008362	05401003501863	05401003700273