

HMF 45 T4 (A5:6) F400

GENERAL DATA



VENTILATOR AXIAL CU CARCASA LUNGA 400°C/2h

CARACTERISTICI CONSTRUCTIVE:

- Ventilator axial cu cadru cilindric ranforsat.
- Ansamblu motor-rotor modular. Rotor din aluminiu cu pale cu unghi reglabil. Protejat impotriva coroziunii cu vopsea pe baza de rasini epoxidice.
- Usa de acces.
- Motor asincron cu rotor in scurtcircuit, cu grad de protectie IP-55 si clasa de izolatie H, certificat 400°C/2h. Tensiuni de alimentare: 400V(Y) 50Hz pentru motoare trifazate pana la 4kW si 400V(D) 50Hz 60Hz pentru puteri superioare.

APLICATII:


- Conceput pentru montaj pe tubulatura, recomandat pentru:
- Evacuarea fumului in caz de incendiu, in interiorul zonei de risc.
- Temperatura maxima de functionare: 60°C

OPTIUNI:

- Rotor de impulsie (sensul aerului de la rotor spre motor).
- Rotor 100% reversibil.

Omologare oficiala de catre Laboratorul European APPLUS in conformitate cu EN 12101-3:2002, EN 12101-3:2002/AC:2005.
Certificat Nr: 0370-CPR-0912

PERFORMANCE CURVE

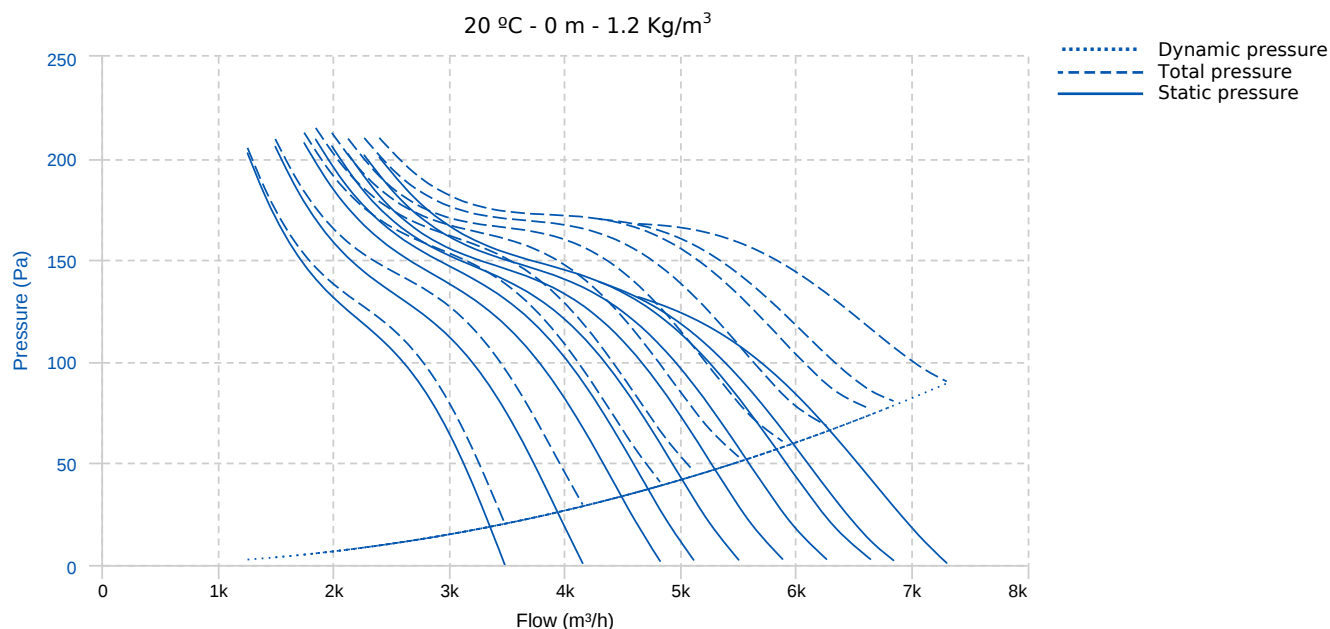


TECHNICAL DATA

Fan

RPM	-	Approx. weight	- kg	Max. Flow	6170 m ³ /h
-----	---	----------------	------	-----------	------------------------

DIMENSIONS

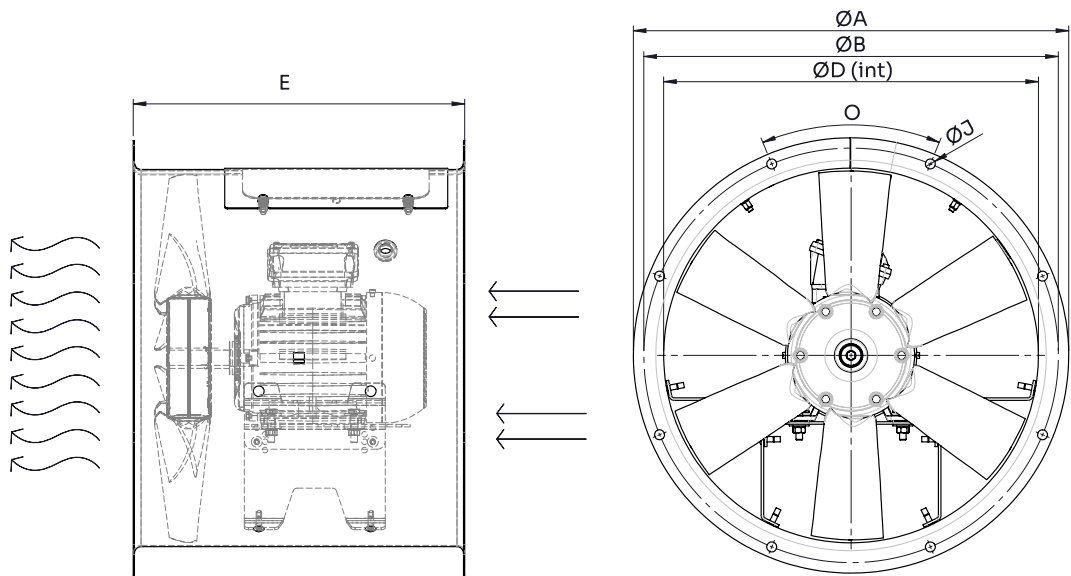


Dimensions (mm)

E	400	O	8X45°	ØA	525	ØB	500	ØD	452
ØJ	12								

WIRING DIAGRAM

230V 

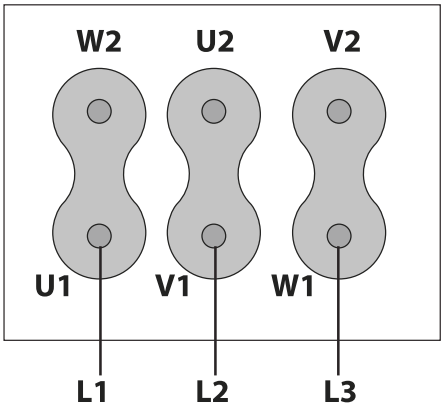

400V 

