

COURSALIS 1500 (509615000M001B)

GENERAL DATA



HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY

Exclusive arch design, light and superfine
High performance and low sound level
Metallic housing with paint finish in white colour
230V 50Hz motor

Impeller made of plastic (AS+fiberglass)
Includes external control by remote control
Designed for horizontal mural installation
Easy adjustable air direction
With operating indicator LED (ambient, air velocity and stop motion)
Mounting brackets on wall
Reach up to 3m.
The indicated weight does not include the packaging (\pm 2Kg.)

APPLICATION


Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

TECHNICAL DATA

Fan							
RPM	1400	Approx. weight	21.8 kg	Max. Flow	2500 m ³ /h		
Motor							
Power	0,23 kW	RPM	1400	I max. (230V)	1,045 A	Approx. weight	0 kg


DIMENSIONS

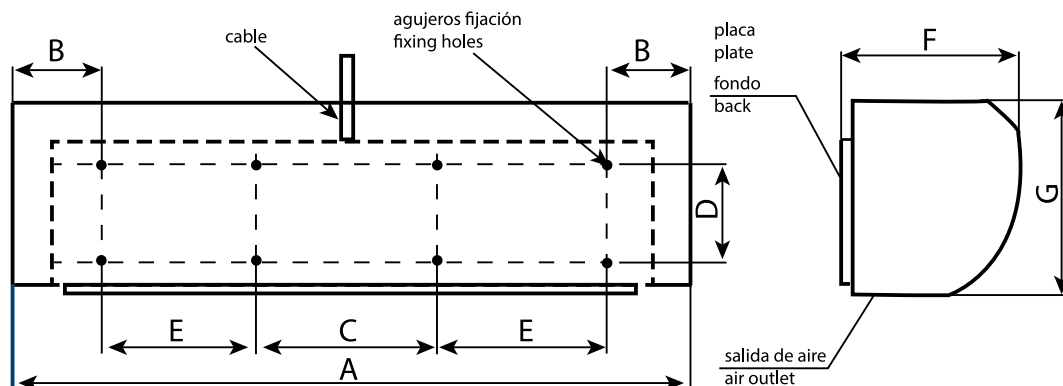

Dimensions (mm)

A	1650	F	195	G	220
---	------	---	-----	---	-----

WIRING DIAGRAM

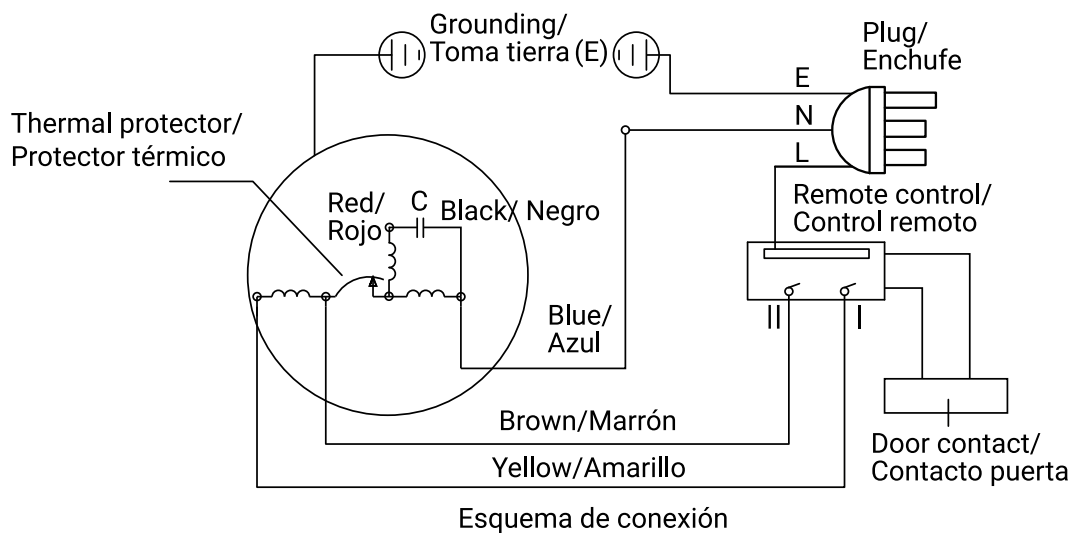

ACCESSORIES



SAFETY SWITCH
INT 25 3P A
REF: INT253PA



MAGNETIC CONTACT DOOR SWITCH FOR COURSALIS
MDS Coursalis
REF: 301034300

