


COURSALIS 2000 E (509620000B)

GENERAL DATA



HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY WITH HEATING

Exclusive arch design, light and superfine
 High performance and low sound level
 Metallic housing with paint finish in white colour
 380V 50Hz motor
 Equipped with electrical coil

Metallic impeller
 Includes external control by remote control
 Designed for horizontal mural installation
 With operating indicator LED (ambient or heating, air velocity and stop motion)
 Mounting brackets on wall
 Reach up to 3m.
 The indicated weight does not include the packaging (\pm 2Kg.)

APPLICATION


Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

TECHNICAL DATA

Fan							
RPM	1400	Approx. weight	29.6 kg	Max. Flow	2400 m³/h		
Motor							
Power	10 kW	RPM	1400	I max. (400V)	26,316 A	Approx. weight	0 kg


DIMENSIONS

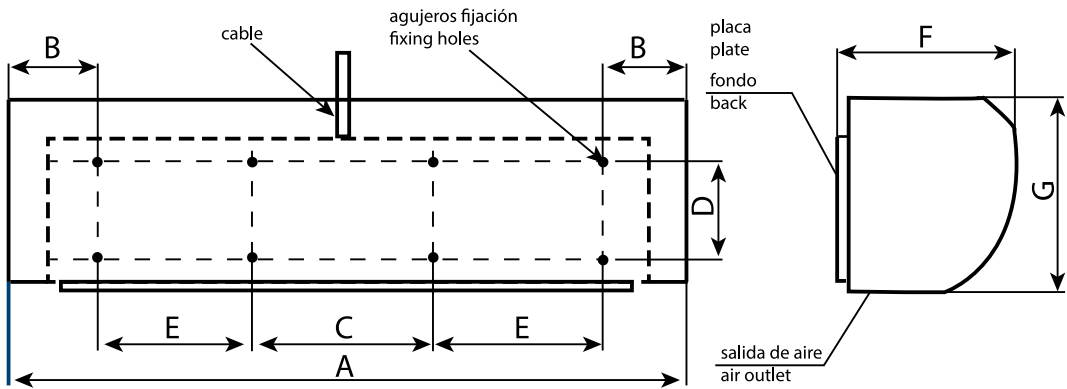

Dimensions (mm)

A	2150	F	195	G	220
---	------	---	-----	---	-----

WIRING DIAGRAM

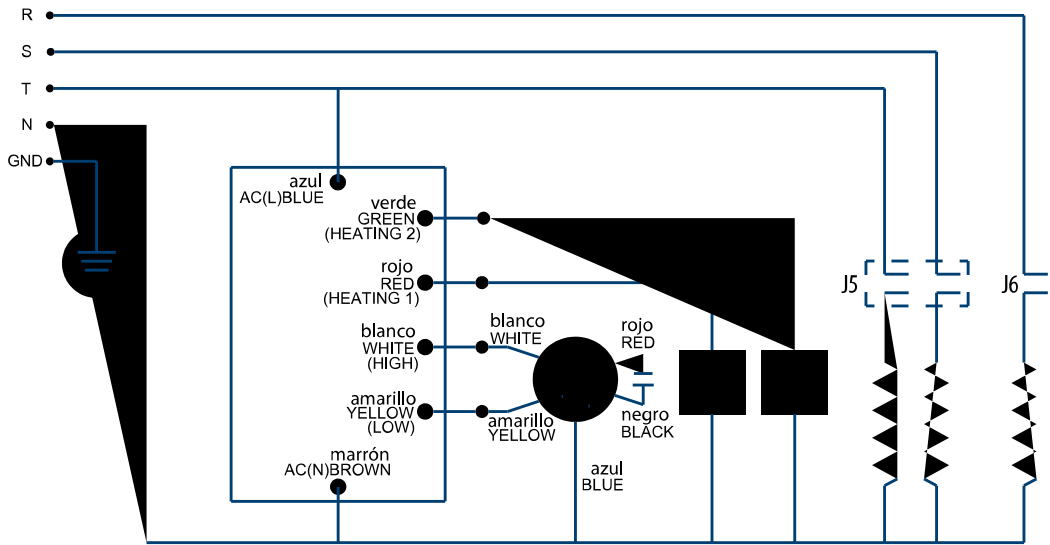

ACCESSORIES



SAFETY SWITCH
INT 32 3P A
REF: INT323PA