

## COURSALIS 2000 (509620000M001B)

### GENERAL DATA



#### HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY

Exclusive arch design, light and superfine  
High performance and low sound level  
Metallic housing with paint finish in white colour  
230V 50Hz motor

Impeller made of plastic (AS+fiberglass)  
Includes external control by remote control  
Designed for horizontal mural installation  
Easy adjustable air direction  
With operating indicator LED (ambient, air velocity and stop motion)  
Mounting brackets on wall  
Reach up to 3m.  
The indicated weight does not include the packaging ( $\pm$  2Kg.)

#### APPLICATION


Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

### TECHNICAL DATA

Fan							
RPM	1400	Approx. weight	26 kg	Max. Flow	3380 m <sup>3</sup> /h		
Motor							
Power	0,33 kW	RPM	1400	I max. (230V)	1,5 A	Approx. weight	0 kg


DIMENSIONS

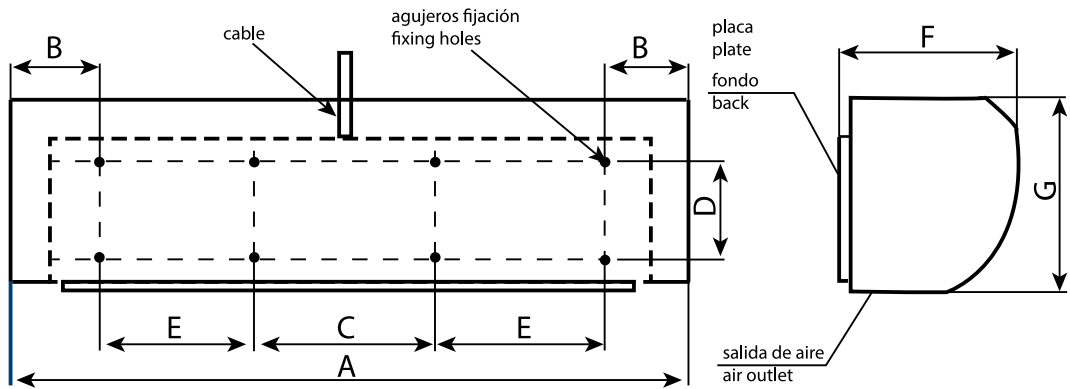

Dimensions (mm)

A	2150	F	195	G	220
---	------	---	-----	---	-----

WIRING DIAGRAM

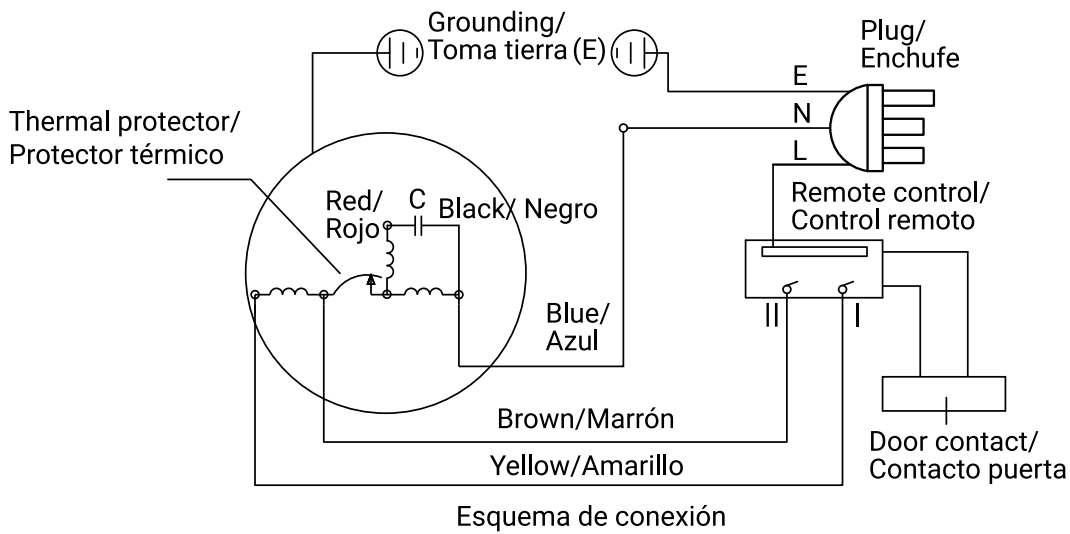

ACCESSORIES



**SAFETY SWITCH**  
**INT 25 3P A**  
**REF: INT253PA**



**MAGNETIC CONTACT DOOR SWITCH FOR COURSALIS**  
**MDS Coursalis**  
**REF: 301034300**

